


COM LITE ALL IN ONE DOWNLIGHT



A versatile downlight with 3 output selections and 3 CCT selections. Can be used as a surface downlight or recessed in any existing holes with a range of 65mm to 205mm.

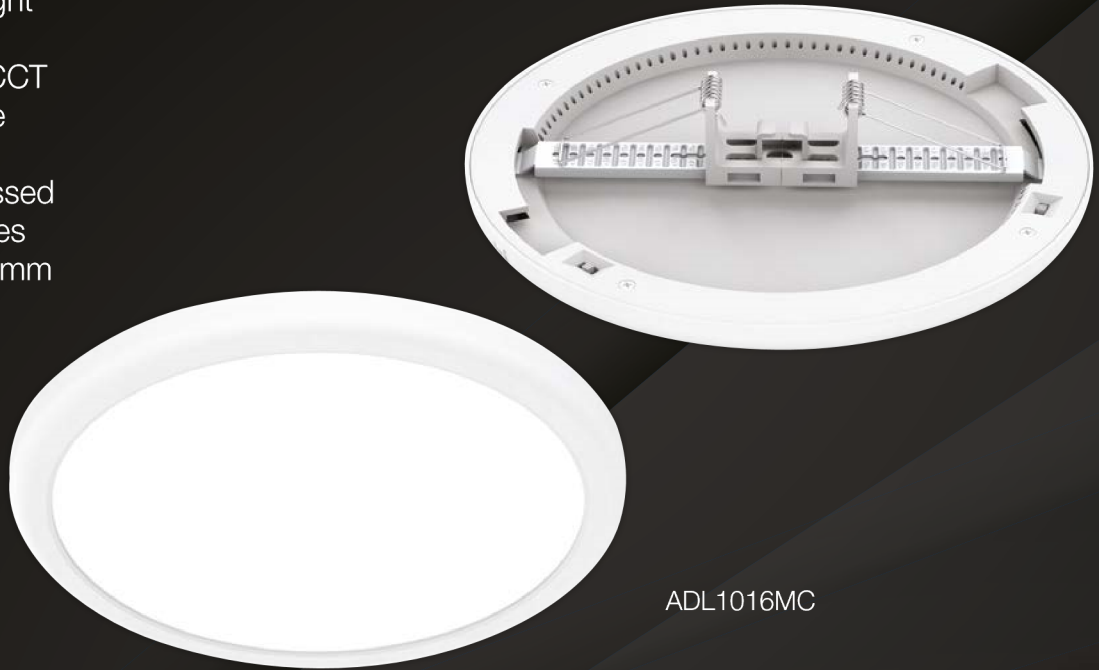

ADL1016MC

KEY FEATURES

- 40,000hr life expectancy
- Beam angle 120 degrees
- CRI > 80
- Diameter 235mm and Height 20mm
- Ideal for use in carehomes, corridors, entrance areas, exhibitions stands and hotels
- Suitable for recessed or surface mounting
- Three selectable light colours (3000k/4000k/5700k)
- Three selectable wattages (10W/13W/16W)
- Zero maintenance

MATERIALS

- Complete with LED lightsource
- Housing and diffuser made with polycarbonate

WARRANTY

3 years

IP RATING

IP20

WATT (W)	COLOUR RENDERING	LUMEN	CUT OUT (mm)
10	3000K	950	65 - 205mm
	4000K	1000	
	5700K	1000	
13	3000K	1200	
	4000K	1400	
	5700K	1400	
16	3000K	1500	
	4000K	1750	
	5700K	1750	