


# Specification - Com Lite All in One Downlights

Revision 1

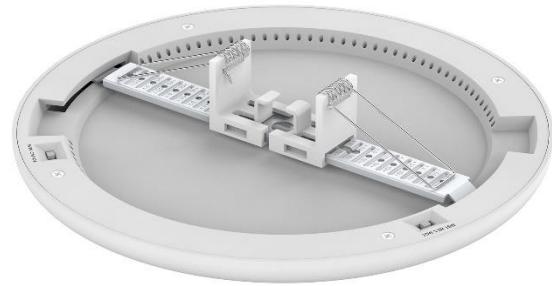

## Product Information

<b>Model No.</b>	ADL1016MC	ADL1622MC
<b>Power Consumption(±5%)</b>	10w/13w/16w	16w/20w/22w
<b>Power Supply</b>	Com Lite	
<b>Input Voltage</b>	220-240 VAC, 50-60Hz	
<b>Power Factor</b>	>0.90	
<b>Driver Type</b>	Constant Current	
<b>LED Type</b>	SMD LED	
<b>Luminous Flux (±10%) 3000k Ra80</b>	1030/1360/1675lm	1670/2015/2310lm
<b>Luminous Flux (±10%) 4000k Ra80</b>	1090/1460/1810lm	1805/2200/2510lm
<b>Efficiency</b>	100-110lm per watt	
<b>CCT</b>	3000/4000/5700k selectable	
<b>Color Rendering Index</b>	Ra80	
<b>Beam Angle</b>	120 degrees	
<b>Class</b>	Class II	
<b>SCDM</b>	< 6	
<b>IK rating</b>	IK06	
<b>IP Rating</b>	IP20	
<b>Colour</b>	White (RAL9016)	
<b>Mounting</b>	Recessed or Surface	
<b>Cut Out</b>	65-205mm	120-260mm
<b>Dimensions (Dia x H)</b>	235x16mm	300x20mm



## Options

<b>Dimmable</b>	No
<b>Emergency</b>	No
<b>Sensor</b>	Remote only

## Applications

**Apartment complexes, Carehomes, Corridors, Hotels, Retail, Toilet Areas**

## Lifespan and Warranty

<b>Lifetime of LED @ Ta=25°C</b>	> 50,000hrs L80B20
<b>Warranty</b>	3 years