


## Specification - Com Lite All in One Downlights

Revision 1



Product Information		
Model No.	ADL1016MC	ADL1622MC
Power Consumption(±5%)	10w/13w/16w	16w/20w/22w
Power Supply	Com Lite	
Input Voltage	220-240 VAC, 50-60Hz	
Power Factor	>0.90	
Driver Type	Constant Current	
LED Type	SMD LED	
Luminous Flux (±10%) 3000k Ra80	1030/1360/1675lm	1670/2015/2310lm
Luminous Flux (±10%) 4000k Ra80	1090/1460/1810lm	1805/2200/2510lm
Efficiency	100-110lm per watt	
CCT	3000/4000/5700k selectable	
Color Rendering Index	Ra80	
Beam Angle	120 degrees	
Class	Class II	
SCDM	< 6	
IK rating	IK06	
IP Rating	IP20	
Colour	White (RAL9016)	
Mounting	Recessed or Surface	
Cut Out	65-205mm	120-260mm
Dimensions (Dia x H)	235x16mm	300x20mm

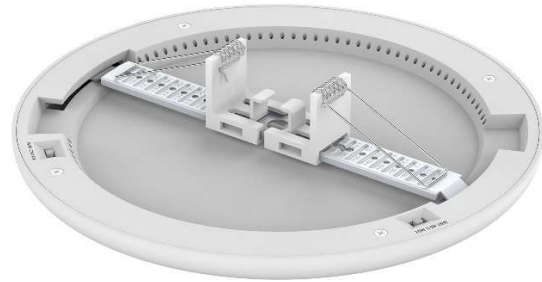

## Options

<b>Dimmable</b>	No
<b>Emergency</b>	No
<b>Sensor</b>	Remote only

## Applications

**Apartment complexes, Carehomes, Corridors, Hotels, Retail, Toilet Areas**

## Lifespan and Warranty

<b>Lifetime of LED @ Ta=25°C</b>	> 50,000hrs L80B20
<b>Warranty</b>	3 years