


Specification - Com Lite Bollard

Revision 1

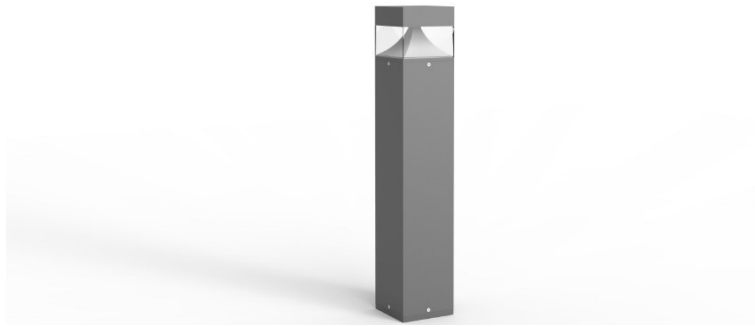


Product Information	
Model No.	B80012/35
Power Consumption(±5%)	14w
Power Supply	Com Lite brand
Input Voltage	220-240 VAC, 50-60Hz
Power Factor	>0.90
Driver Type	Constant Current
LED Type	SMD
Luminous Flux (±10%) 3500k Ra80	1145lm
Optic	Asymmetrical beam
Efficiency (3500k)	> 80lm per watt
CCT	3500k
Colour Rendering Index	Ra80
Class	Class I
SCDM	< 6
IK rating	IK08
IP Rating	IP65
Colour	Charcoal

Options	
Dimmable	Dali, DSI, 1-10v
Emergency	Standard, self test, Dali self test


Applications

Apartment Blocks, Carparks, Hotels, Public Spaces, Retail

Dimensions

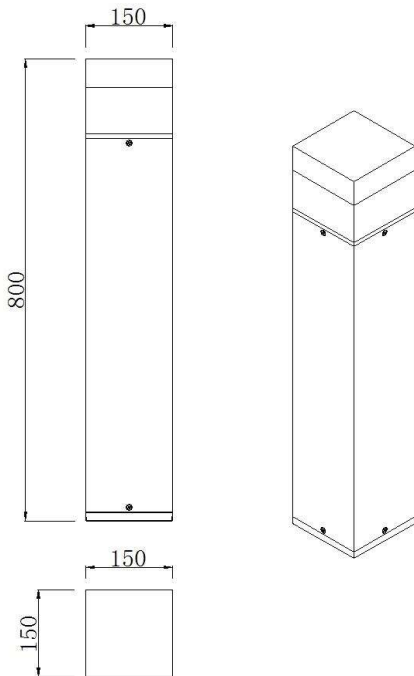

Beam Angle

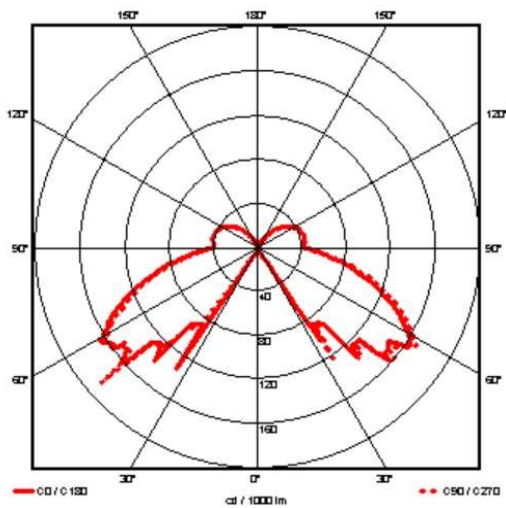

Lifespan and Warranty

Lifetime of LED @ Ta=25°C	> 50,000hrs L80B20
Warranty	5 years