

Specification - Surface emergency spot


Revision 1




Product Information

| | |
|-------------------------------------|---|
| Model No. | SPACKLED SEPACKLED/A |
| Power Consumption(±5%)/Lumen | 0.9w/123lm |
| Input Voltage | 220-240 VAC, 50-60Hz |
| LED Type | 5x0.5w SMD (3w output) |
| CCT | 6000K |
| Mode | Non Maintained as standard (/A model is autotest) |
| Battery | 3.6v 1mah |
| Body Material | Polycarbonate |
| Diffuser Material | Polycarbonate |
| Colour | White RAL9016 |
| Discharge Time | > 3 hours |
| Lens | Open area |
| IP Rating | IP20 |
| Operating Temperature | 0°C ~45°C |

Dimensions

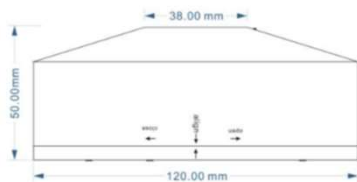

Photometry

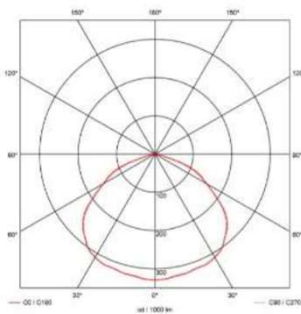

Lifespan and Warranty

| | |
|----------------------------------|-------------|
| Lifetime of LED @ Ta=25°C | > 50,000hrs |
| Warranty | 3 years |