




Tegral
Quality Lighting

Specification - Starlite 65 V2

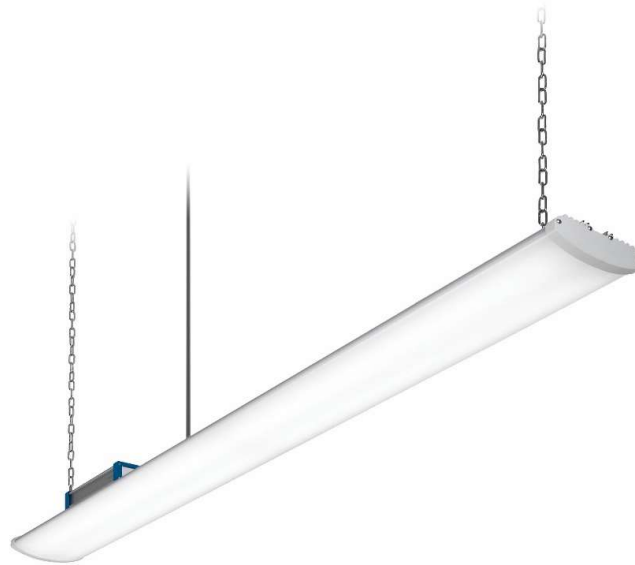

Product Information

Model No.	LHB200/84	LHB200/85
Power Consumption(±5%)	183w	183w
Power Supply	Philips	
Input Voltage	220-240 VAC, 50-60Hz	
Power Factor	>0.90	
Driver Type	Constant Current	
LED Type	SMD led	

Luminous Flux (±10%) Ra80	24810lm	24835lm
Efficiency	> 135lm per watt	
CCT	4000k or 5000k	
Color Rendering Index	Ra80	
Beam Angle	105 degrees	
Class	Class I	
SCDM	< 6	
IK rating	IK10	
IP Rating	IP65	
Colour	Extruded Aluminium	
Dimensions (LxWxH)	1480x150x110mm	

Options

Dimmable	Dali, DSI, 1-10v
Emergency	Standard, self test, Dali self test
Sensor	Batten mounted PIR or microwave sensor

Applications

Exhibition Halls, Retail, Showrooms, Warehouses

Lifespan and Warranty

Lifetime of LED @ Ta=25°C > 87,000hrs L80B20

Warranty 5 years