



Tegral
Quality Lighting

Specification - Starlite 65 V3

Revision 1



Product Information		
Model No.	TWL140V3/65	TWL270V3/65
Power Consumption(±5%)	135w	270w
Power Supply	Philips or European	
Input Voltage	220-240 VAC, 50-60Hz	
Power Factor	>0.95	
Driver Type	Constant Current	
LED Type	SMD	
Luminous Flux (±10%) 4000k Ra80	15610lm	31200lm
Optic	90 degrees	
Efficiency (4000k)	> 115lm per watt	
CCT	4000k (others on request)	
Color Rendering Index	Ra80	
Weight	8.5kg	15kg
Class	Class I	
SCDM	< 3	
IK rating	IK08	
IP Rating	IP65	
Colour	White (RAL9003)	
Diffuser	Tempered clear glass 5mm thickness	
Dimensions	1255x255x109mm	1255x485x109mm
Options		
Dimmable	Dali, 1-10v	
Emergency	Standard, self test, Dali self test (Remote)	
Sensor	Remote only	




Tegral
Quality Lighting


Applications

Retail , Warehouses

Photometry

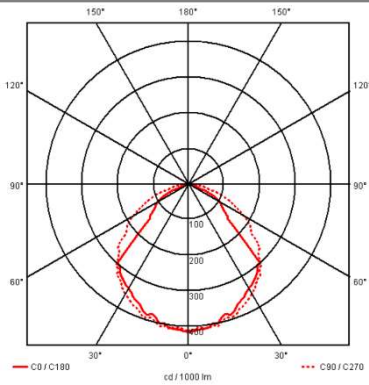

Model TWL140V3/65

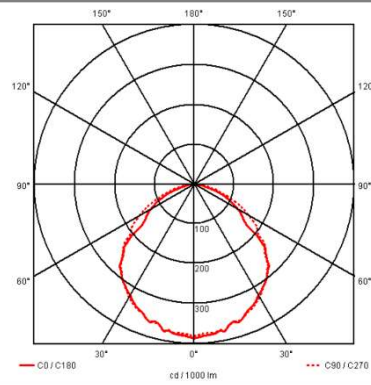

Model TWL270V3/65

Lifespan and Warranty

Lifetime of LED @ Ta=25°C

> 50,000hrs L80B10

Warranty

5 years