


# STARLITE THREE



INDUSTRIAL ▶ Starlite Three

A range of slimline linear, high power low glare highbays suitable for lighting in factories and warehouses where glare control is important.

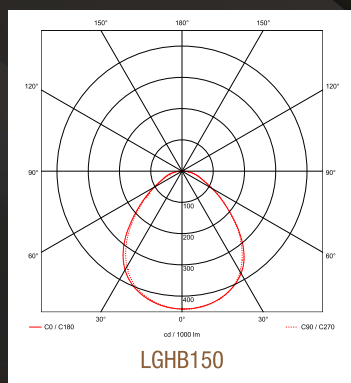

## KEY FEATURES

- 50,000hr life expectancy
- CRI > 80
- Ideal for use in factories and warehouses
- Manufactured with quality materials and reliable driver
- PF > 0.90
- UGR < 19
- Zero maintenance

## MATERIALS

- European branded control gear
- High quality powder coated steel body

## ADDITIONAL INFORMATION

- 5000k supplied as standard others available on special request

## ACCESSORIES AVAILABLE

- Can be fitted with PIR or microwave sensor. Please add /SN or /MS to end of product code
- Dimmable versions available. (See dimmable options.)
- Emergency versions available. Add M3 for standard 3 hour emergency or ST for self test 3 hour emergency.

## DIMMABLE OPTIONS

- /D for 1-10V dimmable
- /DD for DSI digital dimmable
- /DL for Dali and switch dimmable

## WARRANTY

5 years

## IP RATING

IP40

PRODUCT CODE	DESCRIPTION	WATTAGE (W)	DIMENSIONS L x W x H (mm)	LIGHT SOURCE	DIFFUSER TYPE	NET LUMEN OUTPUT	LUMEN PER CIRCUIT WATT
LGHB150/85	Linear low glare Highbay - Charcoal	150W	600 x 420 x 52	SMD LED	Microprismatic	19500lm	> 130
LGHB200/85	Linear low glare Highbay - Charcoal	200W	900 x 420 x 52	SMD LED	Microprismatic	26000lm	> 130
LGHB300/85	Linear low glare Highbay - Charcoal	300W	1200 x 420 x 52	SMD LED	Microprismatic	39000lm	> 130