

# Specification - Com Lite Streetlights V2 Models

Revision 1




Product Information				
<b>Model No.</b>	SL20/35	SL40/35	SL100/35	SL150/35
<b>Power Consumption(±5%)</b>	20w	40w	100w	150w
<b>Power Supply</b>	Done			
<b>Input Voltage</b>	220-240 VAC, 50-60Hz			
<b>Power Factor</b>	>0.90			
<b>Driver Type</b>	Constant Current			
<b>LED Type</b>	SMD 2835			
<b>Luminous Flux (±10%) 3500k Ra80</b>	2675lm	5350lm	13850lm	20330lm
<b>Control</b>	Photocell Nema socket (supplied with blanking cap)			
<b>Efficiency (4000k)</b>	> 130lm per watt			
<b>CCT</b>	3500k (others on special request)			
<b>Colour Rendering Index</b>	Ra70			
<b>Surge Protection</b>	6kV line-line, 15kV line-earth			
<b>Class</b>	Class I			
<b>SCDM</b>	< 6			
<b>IK rating</b>	IK10			
<b>IP Rating</b>	IP66			
<b>Colour</b>	RAL9017 (Black) or Grey			
<b>Finish</b>	Akzo powder coating			
<b>EPA</b>	0.75ft <sup>2</sup> /0.06m <sup>2</sup>			
Options				
<b>Dimmable</b>	Dali, 1-10v			
<b>Photocell</b>	Nema kit (PCKIT)			
Applications				

Carparks, Retail Parks, Streetlighting


## Mounting Options

Post top or side entry

## Dimensions

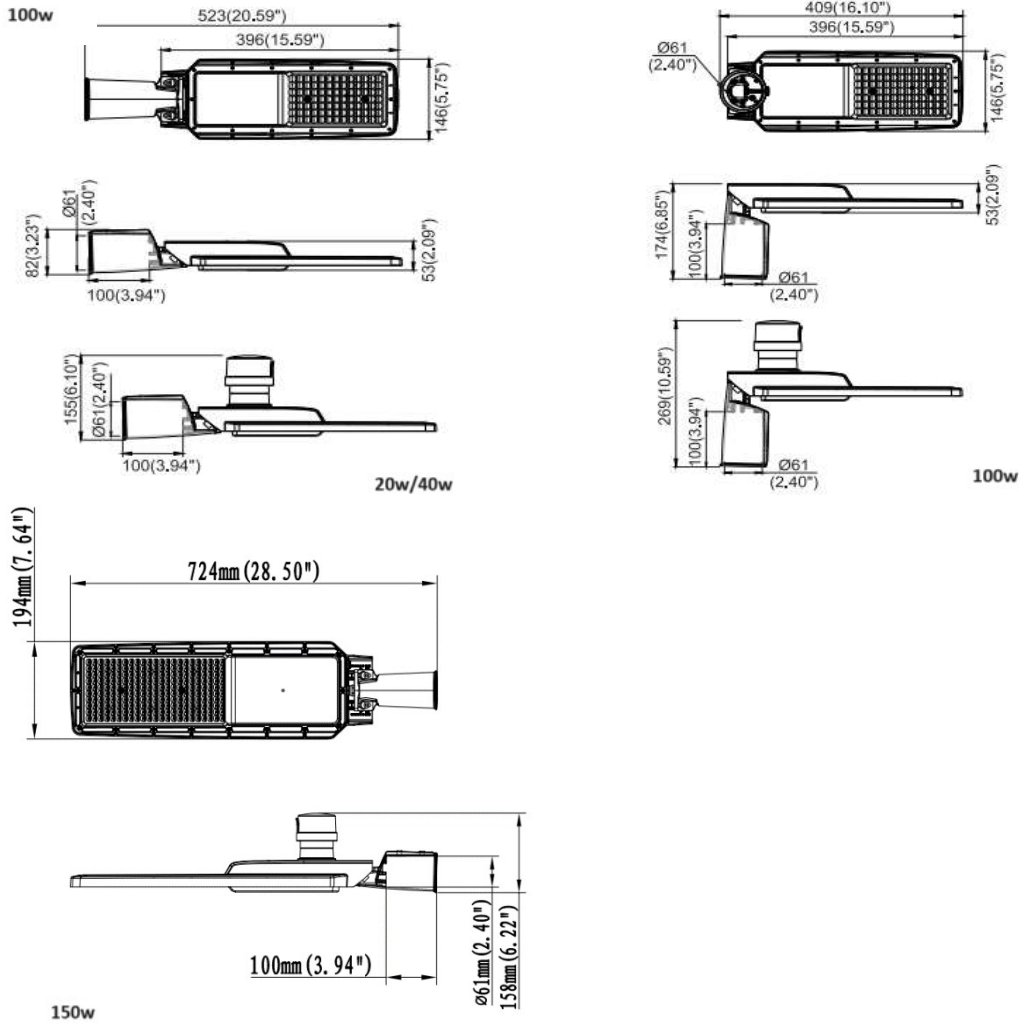

## Beam Angle

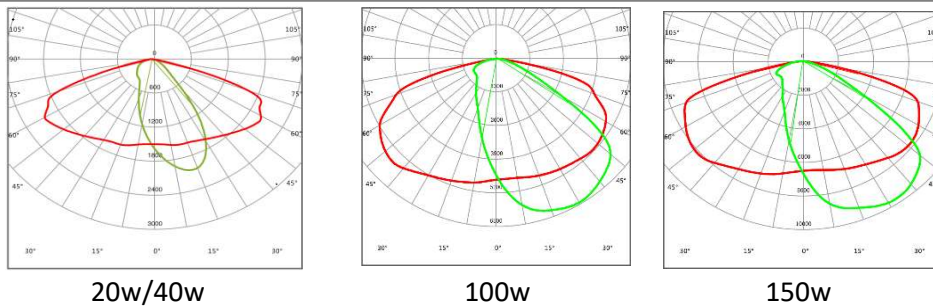

## Lifespan and Warranty

Lifetime of LED @ Ta=25°C

> 80,000hrs L80B20

Warranty

5 years