

# Specification - Emergency IP65 Dali Bulkhead


Revision 1



## Product Information

<b>Model No.</b>	EBHML/DL
<b>Power Consumption(±5%)</b>	4w
<b>Input Voltage</b>	220-240 VAC, 50-60Hz
<b>LED Type</b>	SMD 2835
<b>CCT</b>	5000k
<b>Mode</b>	Maintained (default) or non maintained, Self-test Function as standard
<b>Battery</b>	LifePO4 6.4v 1500mah
<b>Body Material</b>	Polycarbonate
<b>Diffuser Material</b>	Polycarbonate
<b>Colour</b>	White (Black Base optional)
<b>Discharge Time</b>	> 3 hours
<b>Lumen Output</b>	250lm
<b>IP Rating</b>	IP65
<b>Surge protection</b>	.5kv (can withstand voltage AC3750v)
<b>Operating Temperature</b>	0°C ~45°C

## Dimensions

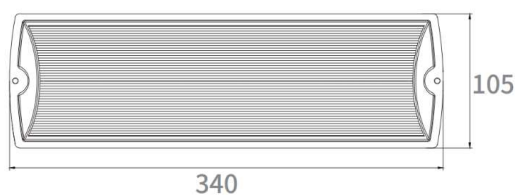

## Mounting Options/Accessories

Surface as standard. Option of recessed frame , model EBHML/DLRF  
Sticker legends (included)

## Lifespan and Warranty

<b>Lifetime of LED @ Ta=25°C</b>	> 50,000hrs
<b>Warranty</b>	5 years (3 years for battery)