

## Specification - Emergency IP65 Dali Twinspot


Revision 1



### Product Information

|                               |  |
|-------------------------------|--|
| <b>Model No.</b>              | TWINS P65/DL                                   |
| <b>Power Consumption(±5%)</b> | 5w   |
| <b>Input Voltage</b>          | 220-240 VAC, 50-60Hz                           |
| <b>LED Type</b>               | SMD 2835                                       |
| <b>CCT</b>                    | 5000k  |
| <b>Mode</b>                   | Non Maintained, Self-test Function as standard |
| <b>Battery</b>                | LifePO4 6.4v 3200mah                           |
| <b>Body Material</b>          | Polycarbonate                                  |
| <b>Diffuser Material</b>      | Polycarbonate                                  |
| <b>Colour</b>                 | White  |
| <b>Discharge Time</b>         | > 3 hours                                      |
| <b>Lumen Output</b>           | 780lm  |
| <b>IP Rating</b>              | IP65   |
| <b>Surge protection</b>       | .5kv (can withstand voltage AC3750v)           |
| <b>Operating Temperature</b>  | 0°C ~45°C                                      |
| <b>Protection Class</b>       | Class II                                       |

### Dimensions

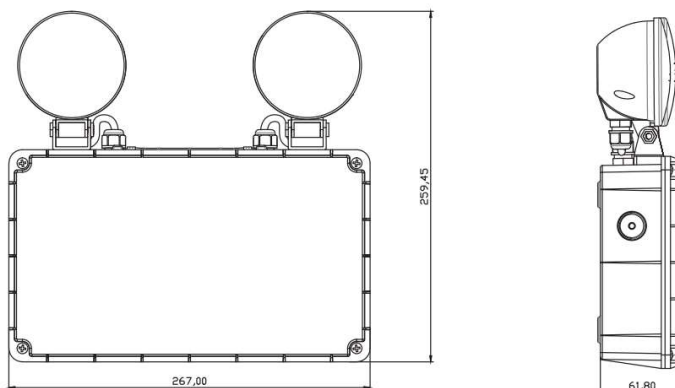

### Lifespan and Warranty

|                                  |                               |
|----------------------------------|-------------------------------|
| <b>Lifetime of LED @ Ta=25°C</b> | > 50,000hrs                   |
| <b>Warranty</b>                  | 5 years (3 years for battery) |