

Specification - Recessed high output emergency spot

Revision 1



Product Information

Model No.	EDL1NM	DLEP5W
Power Consumption(±5%)/Lumen	3w/220lm	4w/400lm
Input Voltage	220-240 VAC, 50-60Hz	
LED Type	Samsung 3535	
CCT	5000k	
Mode	Non Maintained as standard	
Battery	LifePO4 6.4v 1500mah / LifePo4 6.4v 3200mah	
Body Material	Polycarbonate	
Diffuser Material	Polycarbonate	
Colour	White RAL9016 (Black ring as option)	
Discharge Time	> 3 hours	
Lens	Open area and corridor supplied	
IP Rating	IP20	
Surge protection	.5kv (can withstand voltage AC3750v)	
Operating Temperature	0°C ~45°C	



Dimensions

Cut Out	45-125mm (with large ring)
Dimensions	55mm diameter as standard, supplied with 80mm diameter ext ring

Accessories

140mm extension ring	Model EXR140 or Black EX140BK
Black cover	Model EDL1NMBC

Photometry

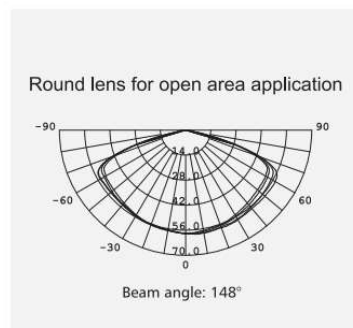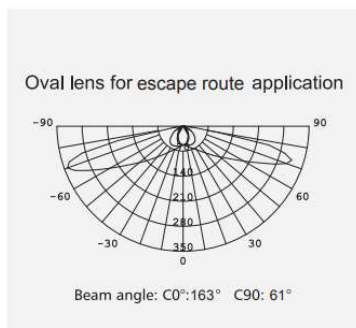

Lifespan and Warranty

Lifetime of LED @ Ta=25°C	> 50,000hrs
Warranty	5 years (3 years for battery)